


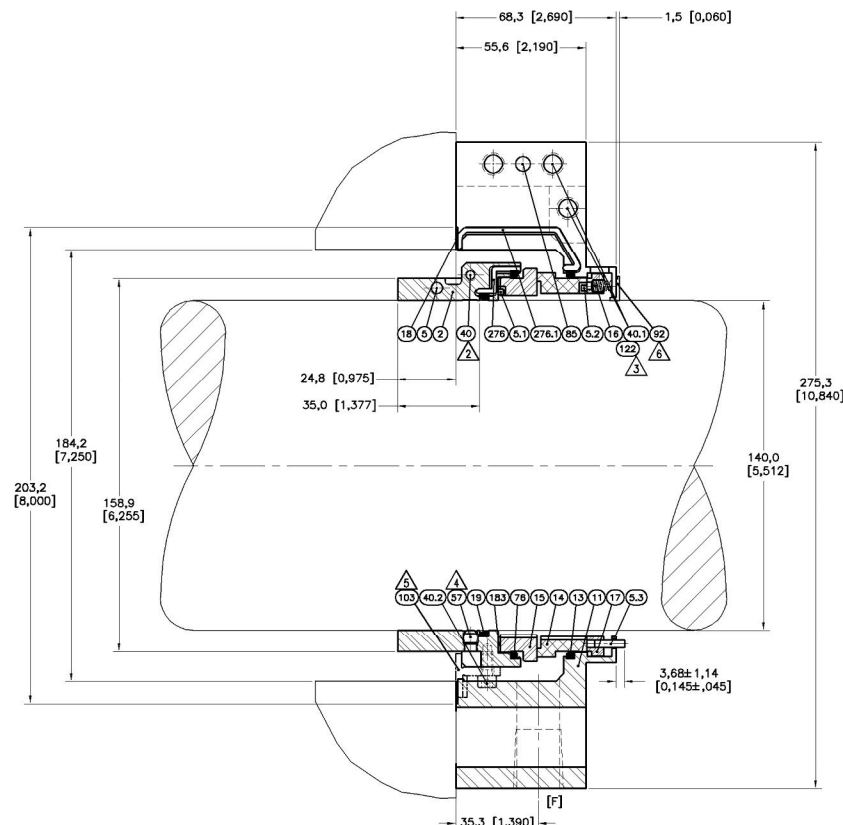

[F] FLUSH 1/2 NPT
冲洗

NOTES:


1. FOR INSTALLATION AND OPERATING INSTRUCTIONS SEE APPROPRIATE FLOWSEWER INSTALLATION SHEET (FIS).
按照福斯提供的安装操作手册进行运行设备。
2. TIGHTEN CAP SCREWS '40.1' TO APPROXIMATELY 5.6N.M [50 LBF.INCH].
40.1英寸螺帽扭矩约为5.6 N.M [50 LBF.INCH]。
3. TIGHTEN CAP SCREWS '40.1' TO APPROXIMATELY 120 INCH-POUNDS.
40.1英寸螺帽扭矩约为13.6 N.M [120 LBF.INCH]。
4. TIGHTEN SET SCREWS '57' TO APPROXIMATELY 50 INCH-POUNDS.
57英寸螺帽扭矩约为5.6 N.M [50 LBF.INCH]。
5. REMOVE SETTING DEVICES '103' AFTER INSTALLATION OF SEAL DRIVE.
机封安装完后，移除定位块103号。
6. REMOVE CENTERING DEVICES '92' AFTER SEAL INSTALLATION.
机封安装完后，移除对中装置92号。

REVISION: - DATE: 11-MAY-2018 BY: PLIU TECH: HAN TECH NO: 1
REVISION NOTE: RELEASE TO MANUFACTURE.

THIS DRAWING AND ANY DESIGN, DEVELOPMENT, INVENTION OR COPYRIGHT WHICH IT MAY EMBODY OR REPRESENT ARE THE PROPERTY OF FLOWBERRY CORPORATION. THIS DRAWING MAY NOT BE REPRODUCED, NOR ANY SUBJECT MATTER SHOWN HEREIN MAY BE MANUFACTURED, WITHOUT WRITTEN PERMISSION FROM AN AUTHORIZED AGENT OF FLOWBERRY CORPORATION.

DIW'S ARE REF UNLESS SPECIFIED OTHERWISE.
DIW'S IN INCHES (MM)

D/JUL/201

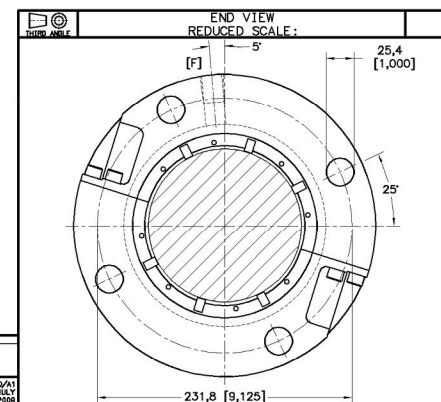[illegible]

	API PLAN 13 RECYCLATION FROM SOLID CHAMBER TANKS TO THE CHAMBER AND BACK TO PUMP SECTION	PROPODUT: WATER TEMP: 80°C MAX SOLID CHAMBER PRESS: 0.1-1.0 MPa SOLID SIZE: 150µ EQUIP ITEM NO.: 15-410	SCALE: 1/8"=1'-0" DATE: 11-MAR-2016 CORN: DMN DRAWING NO: 1005572 REV: 1
1. SOLID CHAMBER PRESSURE AT LEAST 10 PSI HIGHER THAN CHAMBER PRESSURE IN MAINLINE + 2 PSI (2 FT) TANK VAPOR PRESSURE	FLUSH (INJECTION) RATE: 0 L/MIN @ 0 MPa PIPING REQUIREMENTS OUTLETS: 1" NPT 4000 GPM WORKING 100 PSI ULTIMATE USER: VIETNAM SOLID CHAMBER	SEAL TYPE: P55 (1) SEAL CONF: IS SINGLE INNON-CART MATL CODE: SZAT EQUIP MFG: EQUIP MODEL: EQUIP DWT:	SEAL SIZE: 140mm INSTR: F18175
FLOWERVE 4000 GPM	100 PSI	150µ	1005572

THIS DOCUMENT AND ANY DESIGN, DEVELOPMENT, INVENTION OR COPYRIGHT WHICH IT MAY EMBODY OR REPRESENT ARE THE PROPERTY OF FLOWSERVE CORPORATION. THIS DOCUMENT MAY NOT BE REPRODUCED, NOR ANY SUBJECT MATTER SHOWN HEREIN BE MANUFACTURED, WITHOUT WRITTEN PERMISSION FROM AN AUTHORIZED AGENT OF FLOWSERVE CORPORATION.